



# TYRES TO MOVE THE EARTH



# BACKHOE LOADER TYRES





Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (Kmph)	Inflation (Psi)	Max Load (Kgs)
<b>REAR TYRES</b>							
14.9-24	MUSCLEROK	R4	12	TT	40	42	1750
16.9-28	MUSCLEROK	R4	12	TT, TL	40	38	3350
16.9-28	MUSCLEROK-H	R4	12	TT, TL	40	38	3350
14.00-25	MUSCLEROK	E3 / L3	20	TT, TL	50 / 10	69 / 102	4625 / 8500
<b>FRONT TYRES</b>							
12.5 / 80-18	MUSCLEROK	I-3	12	TL, TT	40	54	2650
12.5 / 80-18	MUSCLEROK	I-3	16	TL, TT	40	71	3150
9.00-16	MUSCLEROK	I-2	16	TT	40	123	3250
9.00-16	TT 707		16	TT	40	123	3250
7.50-16	MUSCLEROK		16	TT	30	105	1900
7.50-16	TT 707		16	TT	30	105	1900

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

#### Features:

- Advanced directional industrial tread design
- Tough cut-resistant tread compound
- Heavy sidewall construction
- Rugged nylon casing

#### Benefits:

- Excellent ground holding
- Wider contact area
- Improved tread life and traction
- Resistance to cuts, chips and abrasions
- Prevents tread separation
- Protection from sidewall damage
- High strength and bruise resistance

# CRANES & MOTOR GRADERS TYRES





Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (Kmph)	Inflation (Psi)	Max Load (Kgs)
13.00-24	MUSCLEROK	G2	12	TT	40	44	2725
	MUSCLEROK CRANE						
13.00-24	MUSCLEROK CRANE	G2	16	TT	40	58	3250
13.00-24	MUSCLEROK	G3	12	TT	40	44	2725
14.00-20	MUSCLEROK-X		18	TT	80	95 / 85	4625 / 4000
14.00-20	MUSCLEROK-X		20	TT	80	110 / 100	5000 / 4375
14.00-20	MUSCLEROK-X		22	TT, TL	80	125 / 115	5450 / 4750
14.00-24	MUSCLEROK	G2	12	TT, TL	40	36	3075
14.00-24	MUSCLEROK	G2	16	TT, TL	40	54	3650
14.00-24	MUSCLEROK	G3	16	TT	40	54	3650
14.00-24	MUSCLEROK	G3	20	TT	40	65	4125
14.00-24	MUSCLEROK	E3 / L3	24	TT	50 / 10	83 / 123	5150 / 9500
14.00-24	MUSCLEROK	E3 / L3	28	TT	50 / 10	94 / 145	5600 / 10300
14.00-25	MUSCLEROK	E3 / L3	20	TT, TL	50 / 10	69 / 102	4625 / 8500
14.00-25	MUSCLEROK	E3 / L3	24	TT, TL	50 / 10	83 / 123	5150 / 9500
17.5-25	MUSCLEROK	G2	16	TL	40	40	3350
17.5-25	MUSCLEROK	L3	16	TT, TL	10	69	7300
17.5-25	MUSCLEROK	L3	20	TT, TL	10	83	8250
18.00-25	MUSCLEROK	E3 / L3	12	TL	50 / 10	29 / 40	4750 / 8250
20.5-25	MUSCLEROK	G2	16	TL	40	33	4000

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

#### Features:

- Extra rubber in tread center
- Deep directional tread lug design
- Tough OTR tread compound
- Rugged nylon construction

#### Benefits:

- Long wear and smooth ride over hard surfaces
- Self-cleaning and high traction in a variety of job conditions
- Resistance to cuts, chips, snags and abrasions
- High strength and bruise resistance

# SOIL COMPACTOR TYRES





Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (Kmph)	Inflation (Psi)	Max Load (Kgs)
23.1-26	ROAD TRAC	R3	8	TT, TL	40	16	2575
23.1-26	ROAD TRAC	R3	12	TT, TL	40	25	3250

\*Specifications are subject to change without notice.  
 The Inflation pressures are indicative, please be guided by the OEM recommendations.

**Features:**

- Block type tread pattern
- Tough compound
- Rugged sidewall construction
- Rugged nylon casing

**Benefits:**

- Excellent traction
- Increased resistance to snagging and tearing
- Protection from sidewall damage
- High strength and bruise resistance

# SELF-LOADING CEMENT MIXER TYRES







Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (kmph)	Inflation (Psi)	Max Load (kgs)
405 / 70-20	MUSCLEROK-SLM	MPT	14	TL	40	80	4500
405 / 70-20	MUSCLEROK-SLM	MPT	16	TL	40	94	4875
12.0 / 75-18	MUSCLEROK-SLM	IMP	12	TL	40	58	2430 / 1700
12.5 / 80-18	MUSCLEROK-SLM	IMP	14	TL	40	62	3000 / 2120
12.5 / 80-18	MUSCLEROK-SLM	IMP	16	TL	40	71	3150 / 2180
10.0 / 75-15.3	MUSCLEROK-SLM	IMP	18	TL	40	90	2180 / 1550

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

#### Features:

- Pattern designed for dual application in on-road and off-road conditions for construction applications
- Tough cut-resistant tread compound for resistance to cuts, chips and abrasions and protection from sidewall damage
- Block lug combo pattern with optimized ground contact for higher tyre mileage with good Traction

#### Benefits:

- Unique pattern for puncture resistance in rugged terrain
- Inbuilt Self cleaning feature for adverse terrain conditions
- Versatile product for higher mileage with resistance to cuts enabling higher life of tyre

# SKID STEER LOADER TYRES





Available Options	Trade Name	TRA	Ply Rating	Load Capacity			
				Type	Speed (kmph)	Inflation (Psi)	Max Load (kgs)
10-16.5	MUSCLE STEER	NHS	8	TL	10	60	1880
10-16.5	MUSCLE STEER PLUS	NHS	10	TL	10	75	2135
12-16.5	MUSCLE STEER	NHS	10	TL	10	65	2540
12-16.5	MUSCLE STEER PLUS	NHS	12	TL	10	80	2865
23 x 8.5-12	MUSCLE STEER	NHS	12	TL	10	90	1100

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

#### Features:


- Balanced void ratio provides better traction in hard and soft soil
- Cut resistant compound for sidewall & tread
- Sturdy nylon carcass with rigid bead offers excellent gradability

#### Benefits:

- Excellent traction for safe operation
- Good stability on hard surfaces also
- Open tread profile and heavy buttressed lug promotes tread self cleaning

# PNEUMATIC TYRE ROLLER



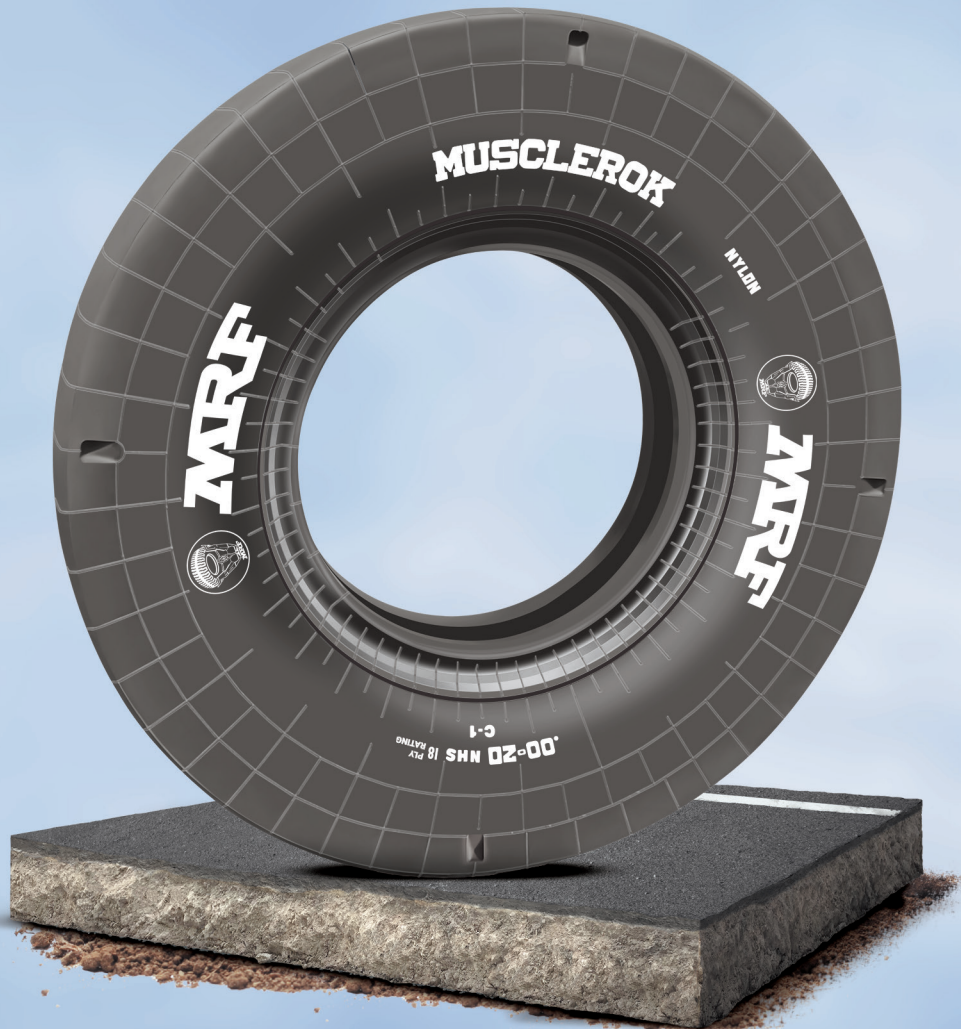

Available Option	Trade Name	TRA	Ply Rating	Load Capacity			
				Type	Speed (kmph)	Inflation (Psi)	Max Load (kgs)
11.00-20	MUSCLEROK-C1	Smooth	18	TT	10	120	5800

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

**Features:**

- High contact area with even pressure distribution
- Heat resistant to suit the type of application

**Benefits:**

- Higher compaction due to higher contact area
- Longer service life with higher durability

# FORK LIFT TYRES



## SOLID TYRES

Available Options	RIM	Section Width (mm) (+/- 5)	Overall Diameter (mm) (+/- 10)	Non-Skid Depth (mm) (+/- 2)	HEEL	
					Normal	Quick / Lip
4.00-8	3.00D-8	103	408	13	✓	✓
15 x 4½-8	3.00D-8	114	382	15	✓	✓
5.00-8	3.00D-8	109	459	22	✓	✓
16 x 6-8	4.33R-8	144	410	15	✓	✓
18 x 7-8	4.33R-8	167	460	17	✓	✓
6.00-9	4.00E-9	132	524	24	✓	✓
21 x 8-9	6.00E-9	183	527	25	✓	✓
6.50-10 (5.00)	5.00F-10	158	562	25	✓	✓
6.50-10 (5.50)	5.50F-10	158	562	25	✓	✓
23 x 9-10	6.50F-10	207	592	27	✓	✓
7.00-12	5.00S-12	172	654	29	✓	✓
27 x 10-12	8.00S-12	245	645	29	✓	✓
8.15-15 (28 x 9-15)	7.00-15	216	707	33	✓	✓
250-15	7.00-15	230	725	34	✓	-
300-15	8.00-15	252	815	35	✓	-
8.25-15	6.50-15	220	815	35	✓	-
9.00-20	7.00-20	232	980	50	✓	-
10.00-20	7.00-20	257	1040	42	✓	-

## PNEUMATIC TYRES

Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (Kmph)	Inflation (Psi)	Max Load (Kgs)
5.00-8	MUSCLELIFT	NHS	8	TT	25	120	950
6.00-9	MUSCLELIFT	NHS	10	TT	25	125	1320
6.50-10	MUSCLELIFT	NHS	10	TT	25	115	1500
7.00-12	MUSCLELIFT	NHS	12	TT	25	125	2060

\* Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

### Features:

- Superior mould design using two-piece tread ring mould provides uniform tyre dimensions and excellent aesthetic appearance
- Enhanced structural design ensuring high stability, high tyre mileage, excellent chipping and chunking resistance, high NSD with angular groove for self-cleaning
- Superior sidewall design with convex curb for sidewall protection and rim guard protector provided to protect rim area from any damage
- Multistage component mixing techniques for low heat hysteresis

### Benefits:

- Abrasion resistant compound for higher mileage
- Double chevron lug pattern for improved stability, better cornering, and braking and less heat buildup resulting in higher tyre mileage
- Highly resilient and elastic rubber compound used for inner layer construction gives maximum driver comfort and stability



# MINING TIPPER TYRES







Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (kmph)	Inflation (Psi)	Max Load (kgs)
12.00-20	MUSCLEROK-X	ML	18	TT	80	115 / 105	3750 / 3350
12.00-20	MUSCLEROK-X	ML	20	TT	80	125 / 115	3875 / 3450
12.00-24	MUSCLEROK-X	ML	18	TT	80	115 / 105	4250 / 3750
12.00-24	MUSCLEROK-X	ML	20	TT	80	125 / 115	4500 / 3875
12.00-24	MUSCLEROK-X Higher load index	ML	20	TT	80	130 / 120	4625 / 4000
12.00-24	MUSCLEROK-X PLUS	ML	20	TT	80	125 / 115	4500 / 3875
12.00-24	MUSCLEROK-H	ML	18	TT	80	115 / 105	4250 / 3750
12.00-24	MUSCLEROK-H	ML	20	TT	80	125 / 115	4500 / 3875
12.00R20	STEEL MUSCLEROK	ML111	18	TT	80	120 / 120	3750 / 3450
12.00R24	STEEL MUSCLEROK	ML111	18	TT	80	120 / 120	4250 / 3875

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

**Features:**

- Double chevron non-directional tread design
- Heavy buttressed lugs
- Heat resistant undertread
- Rugged nylon construction

**Benefits:**

- Excellent pulling power in forward and reverse direction
- Cooler running helps prevent tread separation
- Strong and bruise resistance

# DUMP TRUCK TYRES





Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (Kmph)	Inflation (Psi)	Max Load (Kgs)
14.00-25	MUSCLEROK	E3	40	TT	50	140	7100
16.00-25	MUSCLEROK	E3	28	TL	50	83	6700
16.00-25	MUSCLEROK	E3 / E4	32	TL	50	94	7300
16.00-25	MUSCLEROK	E3	40	TT, TL	50	120	8500
18.00-25	MUSCLEROK	E3	24	TL	50	62	7300
18.00-25	MUSCLEROK	E3	28	TL	50	73	8000
18.00-25	MUSCLEROK	E3 / E4	32	TT, TL	50	83	8750
18.00-25	MUSCLEROK	E3 / E4	40	TT, TL	50	102	9750
18.00-33	MUSCLEROK	E4	32	TL	50	83	10300
18.00-33	MUSCLEROK	E4	36	TL	50	91	10600
18.00-33	MUSCLEROK	E4	40	TL	50	102	11500
21.00-25	MUSCLEROK	E3	40	TL	50	91	11800
21.00-33	MUSCLEROK	E4	40	TL	50	91	13600
21.00-35	MUSCLEROK	E4	36	TL	50	80	12850
21.00-35	MUSCLEROK	E3 / E4	40	TL	50	91	14000
24.00-35	MUSCLEROK	E4	48	TL	50	94	18500
24.00-49	MUSCLEROK	E4	48	TL	50	94	21800
27.00-49	MUSCLEROK	E4	54	TL	50	94	27250
30.00-51	MUSCLEROK	E4	52	TL	50	80	30000

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

#### Features:

- Double Chevron
- Non-directional tread design
- Tread reinforcing bar
- Heavy buttressed lugs
- Tough cut-resistant tread compound
- Heat resistant undertread
- Heavy sidewall construction
- Rugged nylon construction

#### Benefits:

- Excellent pulling power in forward and reverse
- Strengthened and stabilised tread
- Improved tread life and traction
- Resistance to cuts, chips and abrasions
- Cooler running and prevents tread separation
- Protection from sidewall damage
- High strength and bruise resistance

# WIDE BASE - WHEEL LOADER TYRES





Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (Kmph)	Inflation (Psi)	Max Load (Kgs)
14.00-25	MUSCLEROK	E3 / L3	20	TT, TL	50 / 10	69 / 102	4625 / 8500
15.5-25	MUSCLEROK	L3	12	TL	10	58	5600
17.5-25	MUSCLEROK	L3	16	TT, TL	10	69	7300
17.5-25	MUSCLEROK	L3	20	TT, TL	10	83	8250
17.5-25	MUSCLEROK-UG	L5S	20	TL	10	83	8250
18.00-25	MUSCLEROK-UG	L5S	40	TL	10	138	17000
20.5-25	MUSCLEROK	L3	16	TL	10	51	8250
20.5-25	MUSCLEROK	L3	20	TL	10	65	9500
20.5-25	MUSCLEROK	L3	24	TL	10	76	10300
23.5-25	MUSCLEROK	L3	16	TL	10	44	9500
23.5-25	MUSCLEROK	L3	20	TL	10	54	10900
23.5-25	MUSCLEROK	L3	24	TL	10	69	12500
23.5-25	MUSCLEROK-UG	L5	20	TL	10	54	10900
26.5-25	MUSCLEROK	E3 / L3	28	TL	50 / 10	51 / 69	10000 / 15500
26.5-25	MUSCLEROK	E4 / L4	28	TL	50 / 10	51 / 69	10000 / 15500
29.5-25	MUSCLEROK	E3 / L3	28	TL	50 / 10	47 / 62	11500 / 17500
29.5-25	MUSCLEROK	E4 / L4	28	TL	50 / 10	47 / 62	11500 / 17500
29.5-25	MUSCLEROK	E4 / L4	40	TL	50 / 10	69 / 92	14500 / 22400
29.5-29	MUSCLEROK	E4 / L4	28	TL	50 / 10	47 / 62	12150 / 19000
29.5-29	MUSCLEROK	E4 / L4	34	TL	50 / 10	58 / 76	14000 / 21200

\*Specifications are subject to change without notice.

The Inflation pressures are indicative, please be guided by the OEM recommendations.

#### Features:

- Double Chevron
- Non-directional tread design
- Tread reinforcing bar
- Heavy buttressed lugs
- Tough cut-resistant tread compound
- Heat resistant undertread
- Heavy sidewall construction
- Rugged nylon construction

#### Benefits:

- Excellent pulling power in forward and reverse
- Strengthened and stabilised tread
- Improved tread life and traction
- Resistance to cuts, chips and abrasions
- Cooler running and prevents tread separation
- Protection from sidewall damage
- High strength and bruise resistance

# UNDER GROUND MINING TYRES





Available Options	Trade Name	TRA	Ply Rating	Load Capacity			
				Type	Speed (kmph)	Inflation (Psi)	Max Load (kgs)
17.5-25	MUSCLEROK-UG	L5S	20	TL	10	83	8250
18.00-25	MUSCLEROK-UG	L5S	40	TL	10	138	17000
23.5-25	MUSCLEROK-UG	L5	20	TL	10	54	10900

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

**Features:**

- Designed for heavy duty underground mining application
- Shoulder padding for sidewall protection against cuts
- Heavy under tread design provides excellent puncture resistance

**Benefits:**

- Non directional pattern gives excellent traction and braking
- Void profile restricts stone entrapment
- Robust nylon carcass designed to withstand harsh underground mining terrain

# REACH STACKER & RTG TYRES







Available Options	Trade Name	TRA	Ply Rating	Type	Load Capacity		
					Speed (Kmph)	Inflation (Psi)	Max Load (Kgs)
<b>NON-DIRECTIONAL TYRES</b>							
16.00-25	MUSCLEROK	IND3 / IND4	32	TL	10	154	16875
18.00-25	MUSCLEROK	IND3 / IND4	40	TL	10	145	22900
18.00-25	MUSCLEROK-I	IND4	40	TL	10	145	22900
18.00-25	MUSCLEROK	IND4S / IND5S	40	TL	10	145	22900
18.00-33	MUSCLEROK	IND3 / IND4	40	TL	10	145	27500
18.00-33	MUSCLEROK-I	IND4	40	TL	10	145	27500
18.00-33	MUSCLEROK	IND4S	40	TL	10	145	27500
21.00-25	MUSCLEROK	IND3	40	TL	10	145	27500
21.00-35	MUSCLEROK	IND3 / IND4	40	TL	10	145	32800
<b>DIRECTIONAL TYRES</b>							
16.00-25	MUSCLEROK-D	E3 / L3	28	TL	50 / 10	83 / 112	6700 / 11500
16.00-25	MUSCLEROK-D	E3 / L3 / L4	32	TL	50 / 10	94 / 128	7300 / 12700

\*Specifications are subject to change without notice.  
The Inflation pressures are indicative, please be guided by the OEM recommendations.

#### Features:

- Tough cut-resistant tread compound
- Heavy sidewall construction
- Rugged nylon casing

#### Benefits:

- Improved tread life and traction
- Resistance to cuts, chips and abrasions
- Prevents tread separation, improves tread life and traction
- Protection from sidewall damage
- High strength and bruise resistance







**MRF**

**MRF Limited, 114, Greams Road, Chennai - 600 006, India.**

Tel: 91-44-28292777 | [www.mrftyres.com](http://www.mrftyres.com)

For further assistance, email us at: [write2us@mrfmail.com](mailto:write2us@mrfmail.com)

[f](https://www.facebook.com/mrfcorporate)/mrfcorporate [t](https://www.twitter.com/MRFWorldwide)/MRFWorldwide [i](https://www.instagram.com/mrfcorporate)/mrfcorporate